


ANCORSTEEL 1000B

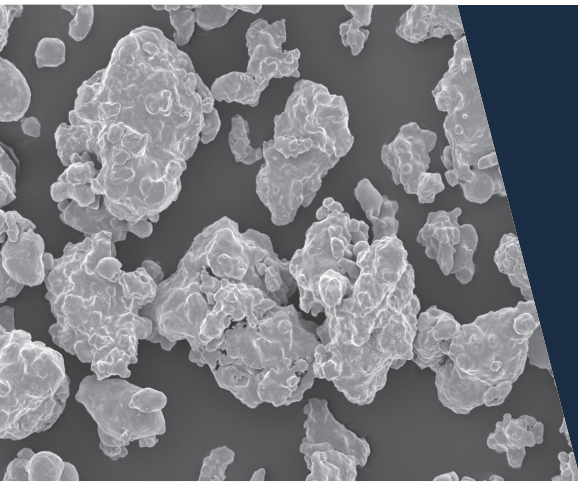


This is the second generation of atomized high compressibility iron powders. It's high purity provides greater compressibility than Ancorsteel 1000. The combination of purity, compressibility, and green strength makes Ancorsteel 1000B ideal for high strength, high density, multi-level structural components. This material conforms to MPlF standard 35 for F-0000.

www.gknpm.com

Nominal Chemistry (weight %)	
Iron	Manganese
Bal.	0.10


Typical Particle Size (weight %)				
Micrometers	+250	-250/+150	-150/+45	-45
U.S. Standard Mesh	(+60)	(-60/+100)	(-100/+325)	(-325)
	Trace	10	70	20

Green Density

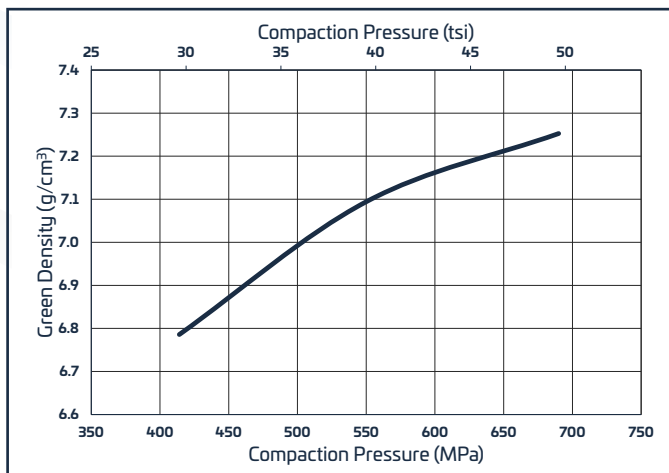

(with 0.75 wt% EBS)

Green Strength

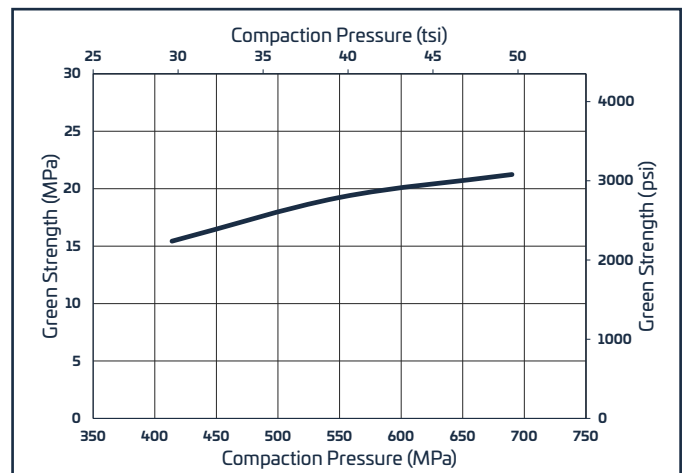


(with 0.75 wt% EBS)

© GKN Powder Metallurgy

This document is for informational purposes only and should not be considered as a binding description of the products or their performance in all applications. The product characteristics and performance data on this page represent standard products and depict their typical performance under controlled laboratory conditions. Actual performance will vary depending on the operating environment and application. GKN Powder Metallurgy reserves the right to revise its products and documents without notification. For product design to meet specific applications, dimensions, electrical and working points, please contact GKN Powder Metallurgy Marketing and Sales.

ANCORSTEEL 1000B

Transverse Rupture Strength Properties

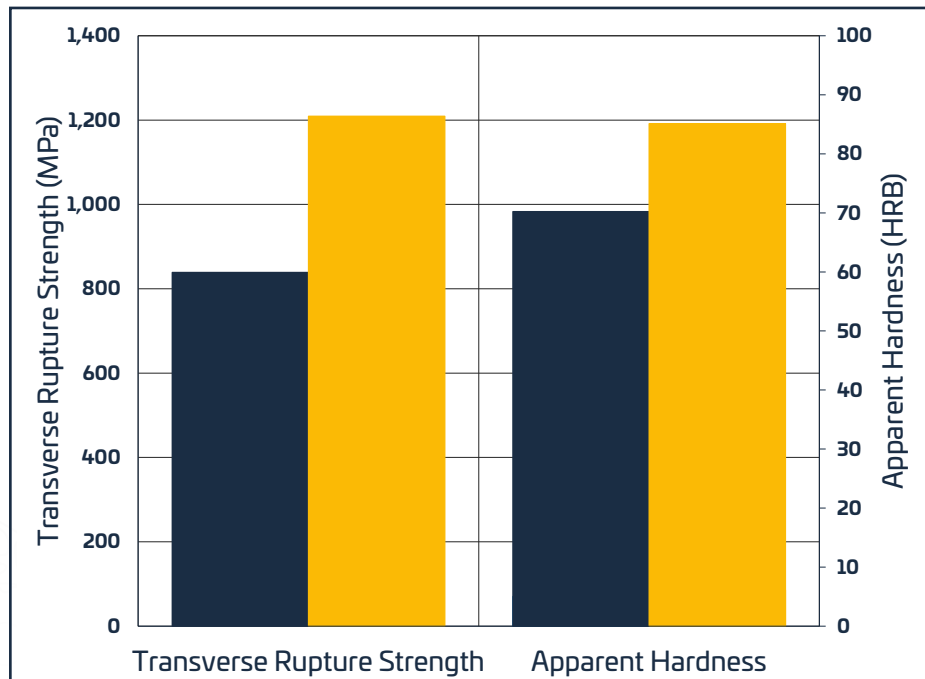


■ Ancorsteel 1000B

■ Ancorsteel 1000B + 2% Copper

(with 0.9 wt% graphite + 0.75 wt% EBS)

Tensile Properties

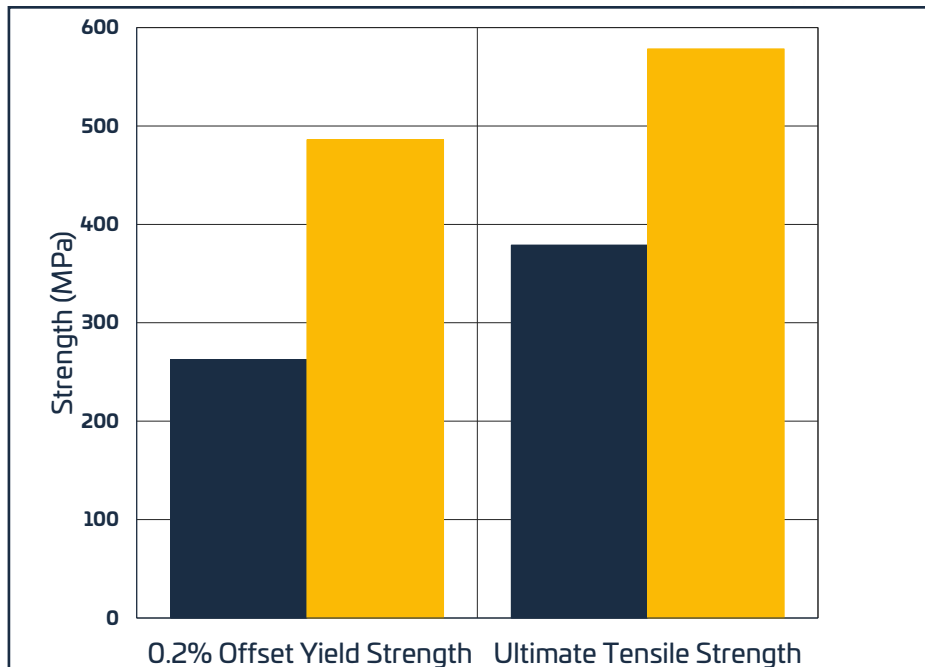

(with 0.9 wt% graphite + 0.75 wt% EBS)

All test specimens were compacted to 7.0 g/cm³ and sintered at 1120 °C (2050 °F) in 90N₂-10H₂ atmosphere with conventional cooling.

© GKN Powder Metallurgy

This document is for informational purposes only and should not be considered as a binding description of the products or their performance in all applications. The product characteristics and performance data on this page represent standard products and depict their typical performance under controlled laboratory conditions. Actual performance will vary depending on the operating environment and application. GKN Powder Metallurgy reserves the right to revise its products and documents without notification. For product design to meet specific applications, dimensions, electrical and working points, please contact GKN Powder Metallurgy Marketing and Sales.